



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

PH N 000 257
LIS # 7

1C903 U.S. PTO
09/841962



BEST AVAILABLE COPY

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

00201529.5

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN
THE HAGUE, 13/11/00
LA HAYE, LE

THIS PAGE BLANK (USPTO)

THIS PAGE BLANK (USPTO)



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

**Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation**

Anmeldung Nr.:
Application no.: 00201529.5
Demande n°:

Anmeldetag:
Date of filing: 28/04/00
Date de dépôt:

Anmelder:
Applicant(s):
Demandeur(s):
Koninklijke Philips Electronics N.V.
5621 BA Eindhoven
NETHERLANDS

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:
Audio system

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:
State:
Pays:

Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:

/

Am Anmeldetag benannte Vertragsstaaten:
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR
Etats contractants désignés lors du dépôt:

Bemerkungen:
Remarks:
Remarques:

THIS PAGE BLANK (USPTO)

Audio system.

The invention relates to an audio reproduction system as described in the preamble of Claim 1.

The invention further relates to audio processing means for use in such an audio reproduction system.

5 The invention further relates to a voice controlled system comprising such an audio reproduction system.

The invention further relates to a video reproduction system comprising such an audio reproduction system.

10 A disadvantage of known audio reproduction systems with stereo or multi-channel audio signals is the fact that the audio quality is strongly dependent on the position of the listener in relation to the loudspeakers. When this position differs from the "ideal" position, the reproduction quality is deteriorated to a great extent. This is caused by unwanted amplitude and phase differences between the acoustic transfer functions of the different
15 loudspeakers to the listener.

A further disadvantage is that also in case the listener has taken a position which is geometrically the "ideal" position the acoustic of the room can cause local amplitude and phase differences between the acoustic transfer functions resulting in a deteriorated reproduction.

20

It is inter alia an object of the invention to obtain an improved audio reproduction system.

25 To achieve these object(s) an audio reproduction system according to the invention comprises the features of claim 1.

By using at least two microphones it is possible to determine the location of the listener, or at least certain characteristics thereof, when the listener speaks. These techniques are commonly known as "Blind Identification" If the microphones are located

close to the loudspeakers, then also the acoustic transfer functions from the listener to the loudspeakers or characteristics thereof, are obtained. The invention is based on the insight that by obtaining the transfer function from the listener to the loudspeakers also the transfer function from the loudspeaker to the listener can be obtained using the reciprocity theorem.

- 5 Hereafter it is possible to amend the audio signal as supplied to the different loudspeakers to optimize the audio quality at the position of the listener by correcting for the identified amplitude and/or phase differences.

- 10 It is to be noticed that from the US Patent US-A-5,386,478 a sound system remote control with an acoustic sensor is known to optimize the sound quality at a particular listening location as sensed by a microphone in a hand-held remote control unit.

A disadvantage of such a sound system is that for audio systems the location of the remote control and the listener's position (especially his ears/head) is not the same.

- 15 An embodiment of the invention comprises the features of claim 2. By using the echo cancellation means the, by the microphone(s), received echo signals from the loudspeakers can be cancelled before the speech signal(s) are further processed.

- 20 It is further to be noticed here that the not-prepublished international application no. PCT/EP99/08253 (Applicant's reference: PHN 17.163) describes a signal source localization arrangement for use in video conferencing systems. Herein the localization is used to make the videoconference more "real" by steering a camera towards the source.

- 25 Further embodiments of the invention are described in the dependent claims.

These and other aspects of the invention will be apparent from and elucidated with reference to the examples described hereinafter. Herein shows

- 30 Figure 1 schematically an example of an audio reproduction system according to the invention, and

Figure 2 a second schematically example of an audio reproduction system according to the invention.

28-04-2000

12:32

PHILOS CIP NL

EP00201529.5

NO. 084

P. SPEC

PHNL000257EPP

3

28.04.2000

Fig. 1 shows an audio reproduction system AS comprising audio processing means APM which audio processing means receive an input audio signal IAS and supply after processing a first output audio signal OAS1 to a first loudspeaker LS1 and a second output audio signal OAS2 to a second loudspeaker LS2. The loudspeakers LS1 and LS2 supply sound signals SS1 and SS2.

The audio reproduction system AS further comprises a first and a second microphone MP1 respectively MP2 for receiving a voice controlled command VCC from a listener P. The first and second microphone MP1, MP2 are coupled to a command unit CU for handling the microphone output signals and supplying a signal to the audio processing means APM.

The audio processing means further comprise echo-cancellation means ECM to cancel the echo signals received with the microphones from the loudspeakers.

The microphones are located in the neighborhood of the respective loudspeakers.

By using at least two microphones it is possible to determine the location of the listener, or at least certain characteristics thereof, when the listener speaks. These techniques are commonly known as "Blind Identification" If the microphones are located close to the loudspeakers, then also the acoustic transfer functions from the listener to the loudspeakers or characteristics thereof, are obtained.

The invention is based on the insight that by obtaining the transfer function from the listener to the loudspeakers also the transfer function from the loudspeaker to the listener can be obtained using the reciprocity theorem.

Hereafter it is possible to amend the audio signal as supplied to the different loudspeakers to optimize the audio quality at the position of the listener by correcting for the identified amplitude and/or phase differences.

By using the echo cancellation means the, by the microphone(s), received echo signals from the loudspeakers can be cancelled before the voice commands are further processed.

In this way it is possible to locate the listener by using e.g. the time difference between the received voice-controlled command at the first respectively second microphone.

Fig. 2 describes in more detail part of the audio reproducing system AS2. This example of a sound reproduction system comprises two closely spaced loudspeakers LS21 and LS22 and two microphones MP21 and MP22. The microphones can be positioned below or above the loudspeaker boxes or they can be integrated into the front panels, or closely in the neighborhood.

The Sound filters H_1 and H_2 operate on the left and right channels (L and R) of the input stereo signal AL and AR, as indicated in fig. 2. A speaker localization algorithm in the audio reproduction system estimates the difference between the acoustic propagation delays from the user's position to the left and right microphone, respectively. Using the reciprocity theorem, this is also the delay difference between the two acoustic paths from the loudspeakers to the listener, as explained above.

Next, this acoustic propagation time delay is compensated for with a delay T_{d1} in the left channel in a delay device TD2 (if the acoustic path length L_2 between the listener and the right loudspeaker is larger than the acoustic path length L_1 between the listener and the left speaker) or a delay T_{d2} in the right channel with a delay device TD1 (if $L_1 > L_2$).

It is noted that the speaker localization algorithm operates on a narrow band speech signal sampled at e.g. $F_s = 8$ kHz, while the Sound filters operate on the full audio bandwidth. The speaker localization is done at low frequencies only, since at frequencies higher than 4 kHz the speech signal contains little power. Also, time delays are ambiguous at higher frequencies due to the short acoustic wavelengths.

The algorithm presented above only works when the music is not playing; with no additional measures the sound emitted by the loudspeakers and picked up by the microphones interferes with the user's speech, leading to incorrect speaker localization. To enable adaptation when the music is playing, two stereo echo cancellers (depicted in figure 1 by ECM) can be used in order to cancel the music signals picked up by the two microphones. In this way, the speaker localization algorithm is not affected by the music. With only one stereo echo canceller operating on one microphone it would be possible to detect a speech command, after which the music can be stopped and the speaker localization can be performed before the music starts playing again.

The speaker localization algorithm can be combined with a speech detector so that adaptation is halted during non-speech periods.

With a speech detector the robustness against background noise is increased.

Above the acoustic speaker localization was combined with the so-called Incredible Sound scheme.

However, combinations with any other type of sound processing (other stereo
5 base wideners or normal stereo) are possible.

Until now Incredible Sound could only be heard at full merits only on one position.

With this invention the applicability of Incredible Sound is greatly increased
10 since the listener is no longer restricted to a certain position. The invention can also be seen as a first step towards voice controlled electronic consumer products, which would be acceptable for the greater public.

Applications of the invention can be found in stereo and multi-channel sound
15 reproduction systems such as televisions, in portable stereo sets, and in others.

Above two examples of an audio reproduction system according to the invention are described wherein the speech signals are also used for voice control.

It will be understood by the man skilled in the art that also in cases where no
20 voice controlled operation of the audio reproduction system is available the invention can be used to advantage. The only need is for each loudspeaker a microphone in the neighborhood of the loudspeaker to receive a speech signal from the listener and the audio processing means will amend the audio signal to improve the reproduced audio signal at the location of the listener.

25

Further it will be noticed that using this audio reproduction system in a video reproduction system is also possible to improve the sound when viewing the pictures on a screen.

CLAIMS:

1. Audio reproduction system comprising audio processing means for processing an input audio signal, at least two loudspeakers to reproduce the processed audio signal, characterized in that the audio reproduction system comprises means to obtain characteristics of the transfer functions from the loudspeakers to the listener, which means comprise for each loudspeaker a microphone, whereby the microphones are located at least in the neighborhood of the loudspeakers, and the audio processing means comprise means to amend the audio signal in dependence of the location of the listener.
2. Voice-operated audio and/or video reproducing system as claimed in claim 1, characterized in that the audio processing means comprise echo-cancellation means for canceling the echo signals received by the microphones.
3. Audio processing means for use in audio and/or video reproduction system as claimed in claim 1.
4. Voice controlled system comprising an audio reproduction system according to claim 1.
5. Video reproduction system comprising an audio reproduction system according to claim 1.

28-04-2000

12:32

PHILIPS CIP NL

EP00201529.5

NO.084

P.1

SPEC

PHNL000257EPP

7

28.04.2000

ABSTRACT:

Audio reproduction systems are used to reproduce audio signals. A disadvantage of known audio reproduction systems is that in most cases with stereo or multi-channel signals the quality performance of reproduction is very much dependent on the listening position.

- 5 The invention proposes a solution by making it possible for the audio reproduction system to localize the position of the listener and amend the reproduced audio signal in dependence of the location.

Fig. 1

1/2

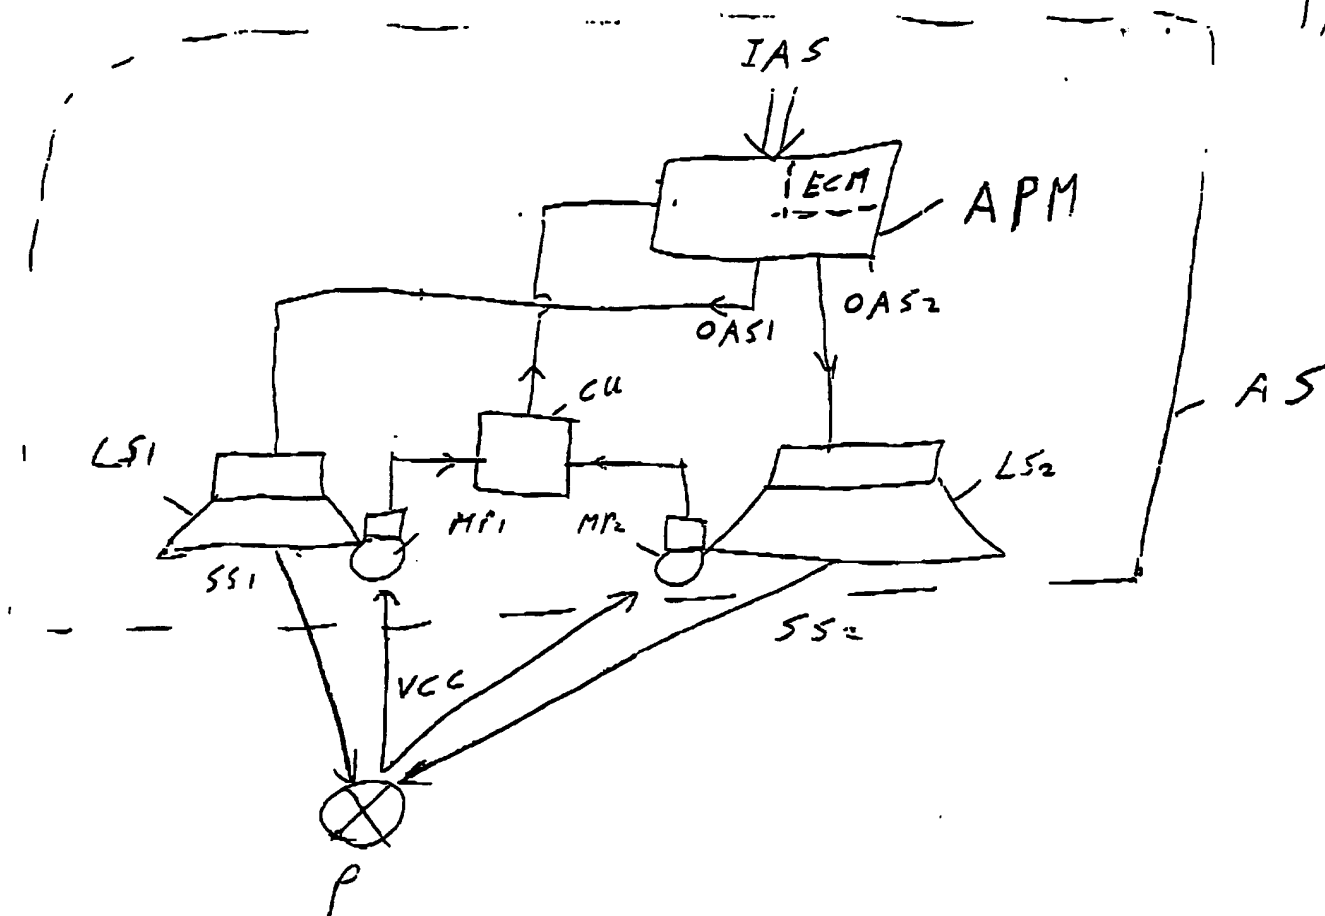


Fig 1.

2/2

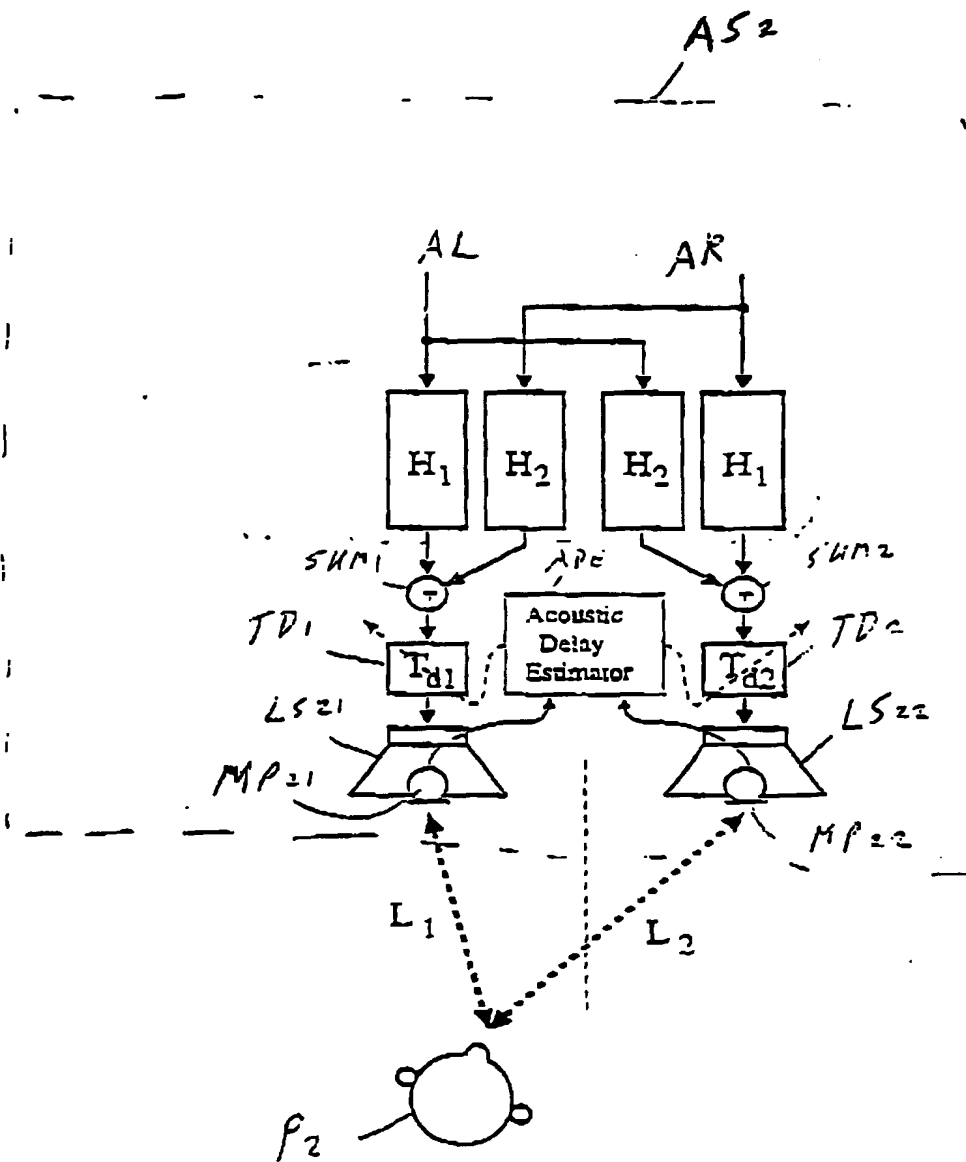


Fig 2

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☒ **GRAY SCALE DOCUMENTS**
- ☒ **LINE(S) OR MARK(S) ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: _____**

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)